


radino Spider RP-SMA

The In-Circuit radino Spider RP-SMA connects a radino module to two pin rows in 2.54 mm pitch for quick application development.

The radino Spider RP-SMA is full Arduino compatible.

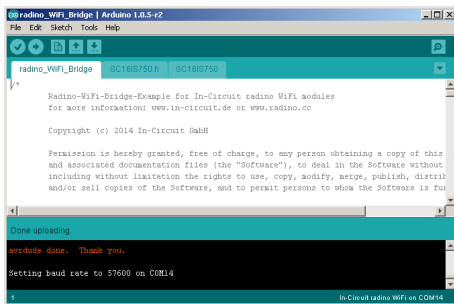

Features


- Arduino compatible
- Fits into 2.54 mm pitch breadboard
- Onboard RP-SMA socket
- USB connector for programming radino modul
- 2x Pin row with all radino module signals available
- User LED, RX/TX LEDs and Power LED
- Input voltage: 5 V DC (USB)
- Onboard 3.3 V regulator
- Temperature range from -10 °C to +70 °C



For more information visit: <http://www.in-circuit.de/>
<http://www.radino.cc/>

Pinout

Pin J1	Description / Function	Pin J2	Description / Function
1	MOSI	1	RXLED
2	MISO	2	TXLED
3	SCK	3	IO12
4	D6	4	SCL
5	IO10	5	SDA
6	IO11	6	A3
7	IO13	7	A0
8	D5	8	A2
9	A5	9	A1
10	RST	10	GND
11	RX	11	3.3V
12	TX	12	GND
13	HWB	13	VIN
14	GND	14	GND

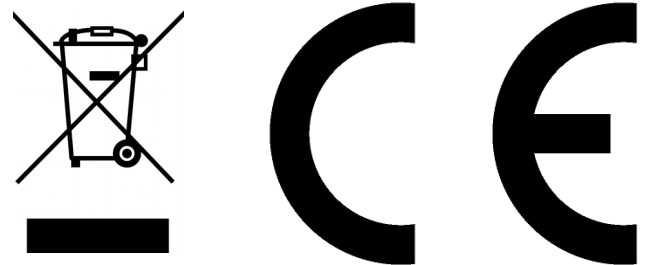

Version	Date	Changes	Editor
A	2015/03/19	Initial Version	Klause