


USB-B-RS232 Bridge

The USB-B-RS232 Bridge connects RS232 components with an USB-Host.



Features

- USB-B for PC plugging
- RS232 male connector
- Baud rate: up to 250kBit/sec
- All RS232 signals on pin header with 2.54 mm pitch
- LEDs: Link, RX and TX

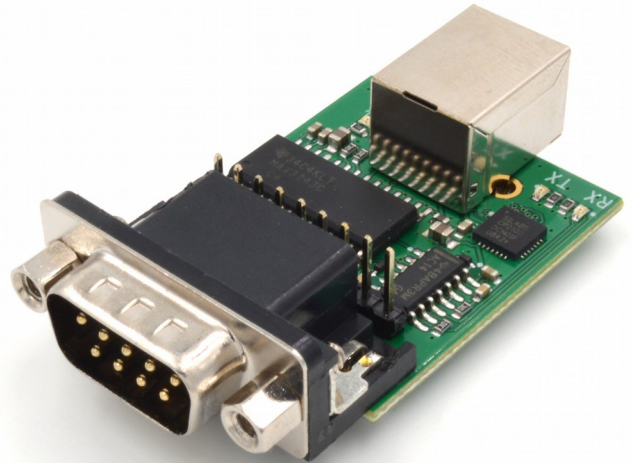

Pinout and Dimensions


J1	Description
1	DCD
2	DSR
3	RXD
4	RTS
5	TXD
6	CTS
7	DTR
8	RI
9	GND

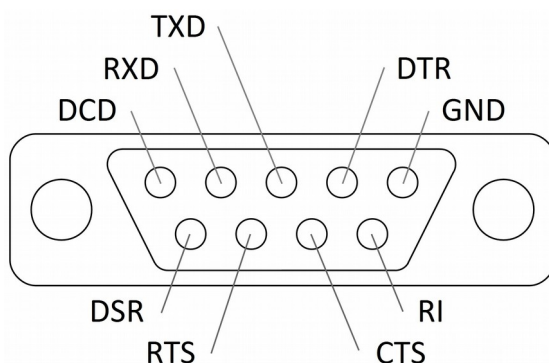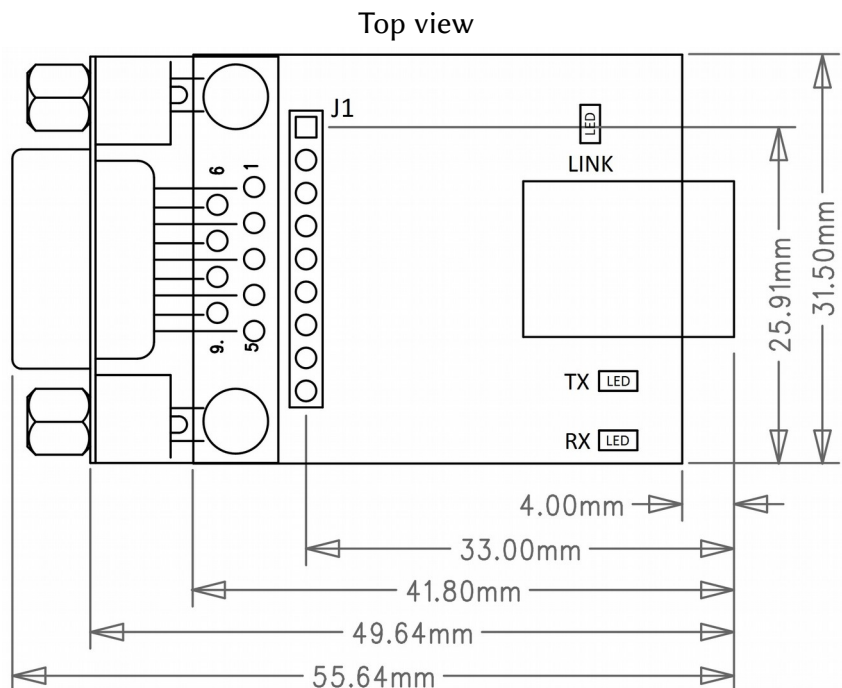

For more information visit:
<http://www.in-circuit.de/>
<http://www.radino.cc/>

Ordering Information

Part	Ordering Code	MOQ	Package
USB-B-RS232 Bridge	901.171	1	Single device in anti-static bubble bag

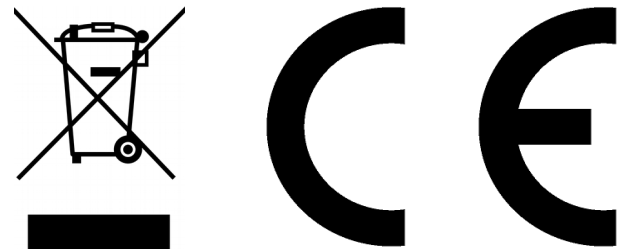

Revision history:

Version	Date	Changes	Editor
A	2017/05/19	Initial Version	Grünig