



## USB-UART-Bridge ISO

The USB-UART-Bridge ISO connects UART components electrically isolated with an USB-Host.

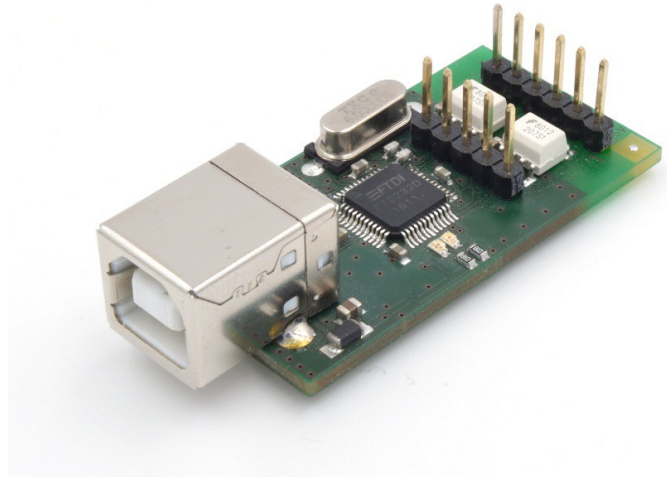


## Features

- USB-B for PC plugging
- Baud rate: up to 3MBit/sec
- LEDs: RX and TX
- IO: RX ( to connect with RX on the  $\mu$ C), TX (to connect with TX on the  $\mu$ C), GND and +5V on power supply of the  $\mu$ C
- Usable with and without flow control

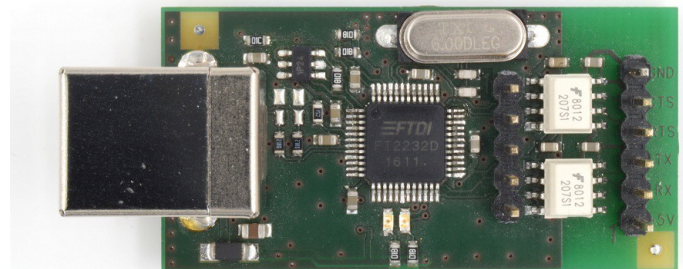

For more information visit:  
<http://www.in-circuit.de/>  
<http://www.radino.cc/>

## Pinout and Dimensions

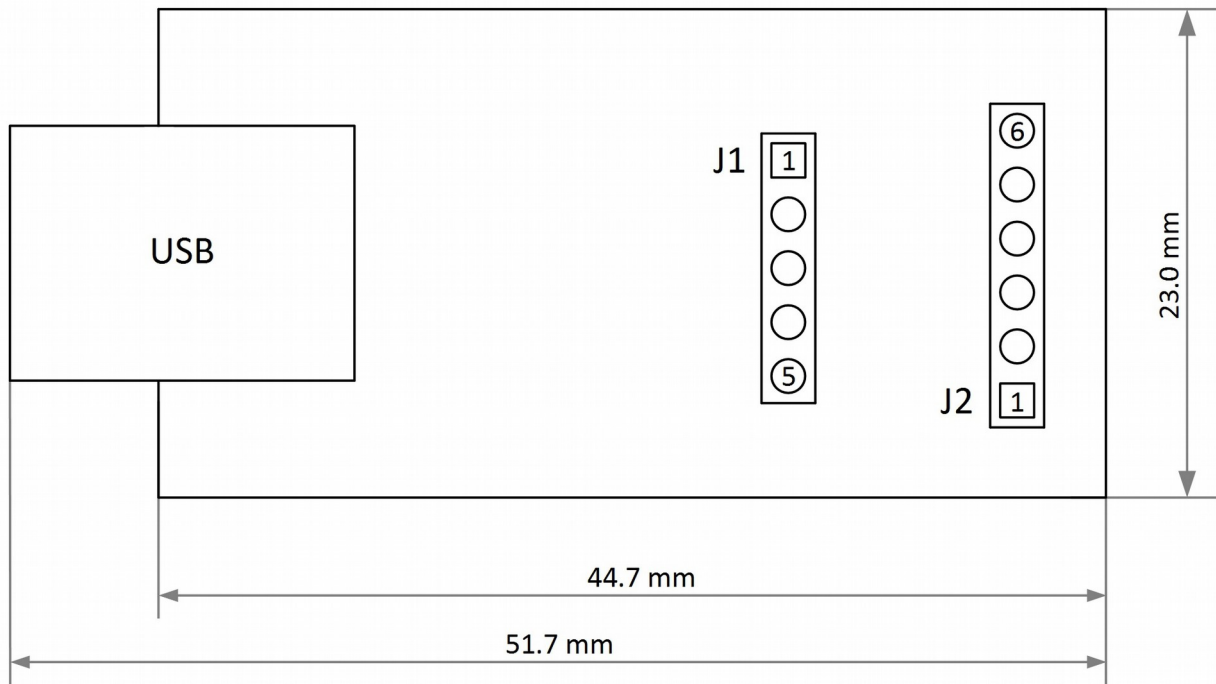

not electrically isolated


J1	Description
1	TXD
2	RTS
3	CTS
4	RXD
5	GND

electrically isolated

J2	Description
1	+5V
2	RXD
3	TXD
4	RTS
5	CTS
6	GND

## Ordering Information

Part	Ordering Code	MOQ	Package
USB-UART-Bridge ISO	901.323	1	Single device in Box

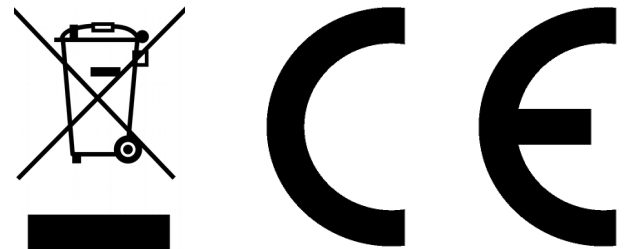

### Revision history:

Version	Date	Changes	Editor
A	2017/06/30	Initial Version	Grünig